## Product Description


PP Interlock Pro flooring tile main material is Modified Polypropylene (PP) and other materials include Color Master Batches, Thermoplastic Elastomer, UV-Resistance Material, which make PP Interlock Pro products have a good performance of anti-UV and anti-aging than other tiles in the market.

PP Interlock Pro tiles can be easily locked together, installer don't need glue and other adhesive materials.


PP Interlock Pro flooring tile is applied for multipurpose sport court like basketball, futsal, tennis, floorball, hockey, badminton, volleyball etc.

It's also widely used for swimming pool, garage, kids playground, wedding pad, backyard and other outdoor & indoor events.

	PP Interlock Pro				
Model	Double-Tier	Knight	Elastic Flooring	Elastic Double Tier	Elastic
Materials	Weather Resistant PP(Polypropylene), Color Master Batches, UV-Resistance Material, Thermoplastic Elastomer				
Dimension (Length* width* height)	250mm * 250mm * 12.7mm	250m m * 250m m * 12.7m m	250m m * 250m m * 15m m	300m m * 300m m * 1 5.8m m	303mm * 303mm * 15mm
Weight	160g/pc (±10g)	190g/pc (±10g)	200g/pc (±10g)	315g/pc (±10g)	340g/pc (±10g)
Shock Absorption	32%	35%	53%	56%	55%
Rolling Load	2500N			2600N	
Ball Bounce Rate	94%	95%	95%	97%	97%
Friction Coefficient	0.60	0.65	0.67	0.70	0.70
Vertical Deformation	2.3mm				
Ambient Temperature	- 40° C - 70° C				
Warranty	10 Years				
Application	Multi-Purpose Sports Court, Professional Basketball Court, Futsal Court, Tennis Court, Roller Skating, Badminton, Volleyball, Hockey, Floorball, Kindergarten, Backyard, wedding pad, swimming pool, Other Outdoor Events, etc.				
Packaging	Carton Size: 790 160 PCS/CTN, 10 Square Meter		Carton Size: 650mm*650mm*370mm, 100 PCS/CTN, 9.19 Square Meters/CTN		



PP Interlock Pro Elastic Double Tier Cushion on bottom

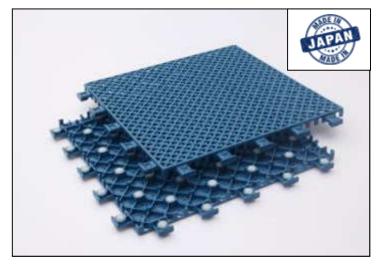

PP Interlock Pro Elastic Double Tier Top & Base Surface

## LaMaCo<sup>™</sup> PP Interlock Pro

Polypropylene Tile Data Sheet




**Extended** locks Make flooring riles lock tightly




**Chamfered edges and corners** Give an excellent protection when players fall down



**Backside cross ribs structure** Provides stronger bearing capacity, avoid deformation and ensure a better buffering effect



Elastic Double - Tier Weight 315±5g Size: 300\*300\*15.8mm





Anti-shrink pillars ensure no bulging Racking and court displacement



Strong toughness material from Exclusive formula help to anti deformation and avoid cracking



50 pieces of elastic cushion on each tile

The design inspiration comes from NBA basketball court structure which gives player an excellent ball bounce rate as well as a better antislip performance



# LaMaCo™ PP Interlock Pro














### LaMaCo<sup>™</sup> PP Interlock Pro

Polypropylene Tile Data Sheet

#### Installation Instruction

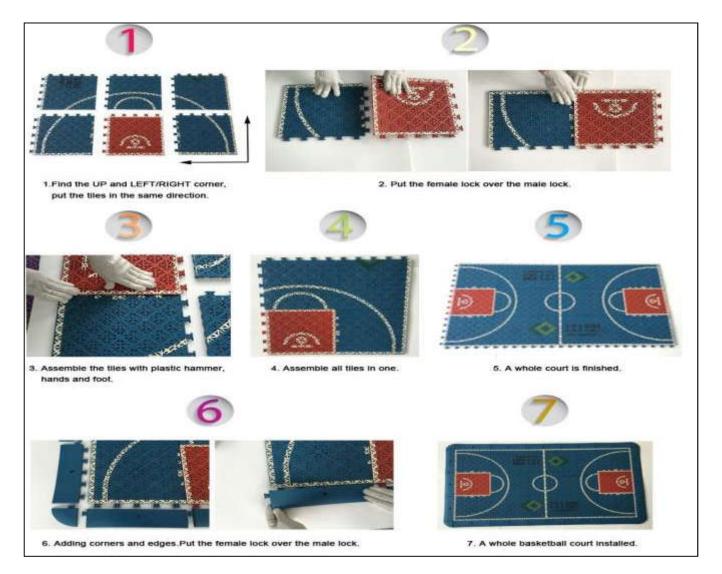

# LaMaCo System Sdn Bhd

407, Jalan Perusahaan 6, Taman Bandar Baru Mergong, 05150 Alor Setar, Kedah, Malaysia Tel : + 60-4-734 5555 Fax : + 60-4-772 4444

LaMaCo

гах	•	+00-4-772 4444
Http	:	www.lamaco.com
Email	:	<u>info@lamaco.com</u>

- Important 1: While the information and data sheet contained in this promotional literature are presented in good faith and believed to be reliable, they do not constitute a part of our terms and conditions of sales unless specifically incorporated in our Order acknowledgement. Nothing herein shall be deemed to constitute a warranty, express or implied, that said information or data sheet are correct or that the products described are merchantable or fit for a particular purpose, or that said information, data sheet or products can be used without infringing patent of third parties.
- Important 2: LaMaCo Malaysia products are not guaranteed against defective materials and manufacture & are sold subject to its standard Terms & Conditions of sale, copies of which may be obtained on request. Whilst LaMaCo Malaysia endeavors to ensure that any advice, recommendation, specification or information is accurate and correct, it cannot-because it has no direct or continuous control over where or how its products are applied accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance any advice, specification, recommendation or information given by it.
- Health & Safety Some of the components of this product may be hazardous during mixing and application. Please consult the relevant Health & Safety Data Sheets, available from LaMaCo Malaysia on request and sent with each delivery.