

Carbon Fiber Reinforced Polymer [CFRP] Mesh Wrap System

is Longitudinal & Latitudinal Data Fabric Type

Pioneer in CFRP,
Smart & Clever for Composites

Structural Strengthening
Building & Civil Engineering
[Column, Beam & Slab]

Timber Strengthening

Masonry Strengthening


Build Mesh CF

Weight of Fiber* Gap* Wide Products List

- 200g/m² [gap 20* 20mm] x 1.50m x 100/m roll
- 300g/m² [gap 20* 20mm] x 1.50m x 100/m roll
- 400g/m² [gap 20* 20mm] x 1.50m x 100/m roll



Build Mesh CF 20020, 30020 & 40020

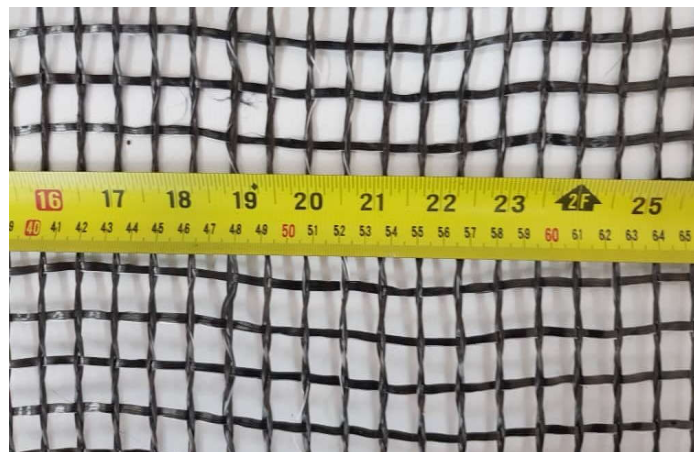

Build Mesh CF 20020, 30020 & 40020



Install of Build Mesh CF on Void Holes



Install on Build Mesh CF 30020 on Wall

**Carbon Fiber Mesh,
is Longitudinal & Latitudinal Data Fabric Type
Carbon Fiber Weight Content, 200, 300 & 400 gm/m²
For Reducing of [Micro Concrete/Grout/Mortar/Shotcrete] Thickness
Strengthening System for Tunnel & Building Works**

Build Mesh CF® is a mesh fabric sheet system of longitudinal & latitudinal oriented, continuous carbon fiber filaments which are held in position by a lightweight, open spacing gap 10mm to 20mm mesh. Build Mesh CF® has robust handling and rapid wet-out characteristics which make it ideal for on-site strengthening of structural of structure reducing of the concrete reinforced thickness, for tunnels or buildings, bridges & marine structures. Additionally, Build Mesh CF® is compatible with all commonly used resin systems which can be applied using a variety of wet-out/resin infusion techniques.

Property of Products Specification

Product Name & Specification	Weight of Carbon Fiber Mesh Fabric [gm/m ²]	Gap of Mesh Fabric [mm]	Width of Mesh Fabric [mm]	Roll Length [m]
Build Mesh CF 20020 Longitudinal, 12K Carbon Fiber Latitudinal, 12K Carbon Fiber	200	20 x 20	1500	100
Build Mesh CF 30020 Longitudinal, 12K Carbon Fiber Latitudinal, 12K Carbon Fiber	300	20 x 20	1500	100
Build Mesh CF 40020 Longitudinal, 12K Carbon Fiber Latitudinal, 12K Carbon Fiber	400	20 x 20	1500	100

Specification Properties Data Sheet

"Build Mesh CF®" - Carbon Fiber Filament Yarn [Actual Dry Fiber] Properties

Typical of Carbon Fiber Properties	SI / Units UK design		US / Units US design	
Tensile Strength	4,900	Mpa	710,500	psi
Tensile Modulus	230-235	Gpa	32.80 x 10 ⁶	psi
Ultimate Elongation	1.80	%	1.80	%
Density	1.79	g/cm ³	0.0646	lb/in ³
Cross-Sectional Area per Filament	0.43	mm ²	6.63 x 10 ⁻⁴	in ²
Approximate Yield (12K)	1.31	m/g	1,950	Ft/lb
Filament Shape	Round		Round	
Filament Diameter	6.7	µm	0.265	mil
Weight/length	0.765	g/m	42.8 x 10 ⁻⁶	lb/in

Specification Physical Properties

Product Name	Weight Carbon Fiber gm/m ²	Reduced of Micro Concrete Thickness [%]	Increase of Tensile Load [kN]	Increase of Compression Load [kN]
Build Mesh CF 20020	200	40-60%	40-75%	45-100%
Build Mesh CF 30020	300	40-60%	40-75%	55-100%
Build Mesh CF 40020	400	50-75%	40-80%	65-100%

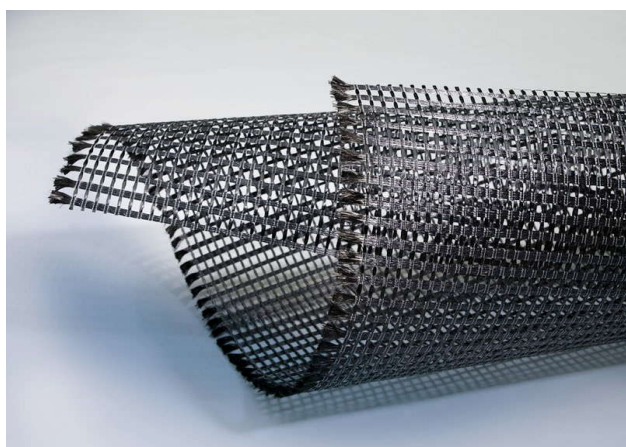


Photo of Build Mesh CF



Photo of Build Mesh CF



Install of Build Mesh CF 40020
 For Reducing of Micro Concrete or Microgrout or Shotcrete
 Thickness, it from 150mm reduced until 45mm Thick



Install of Build Mesh CF 40020
 For Reducing of Micro Concrete or Micro grout
 or Shotcrete Thickness, it from 150mm
 reduced until 45mm Thick



Install of Build Mesh CF 40020
 For Reducing of Micro Concrete or Microgrout
 or Shotcrete Thickness, it from 150mm
 reduced until 40mm Thick

Application Method

Surfaces Preparation

Reinforced concrete surfaces shall be clean, structurally sound and free from foreign materials, contaminants, oily and other debris. Concrete surfaces shall not more than 4% moisture content and the temperature of the substrate must be at least 3°C which above, the current dew point temperature.

Using patching method of Polymer Cementitious Mortar or pumping of High Strength Cementitious Grout. But only for concrete surfaces cracks 0.25mm, must be injected with Low Viscosity of Epoxy Resin for filled. Using high pressure Air-Less Pump for injecting, and penetration into structural crack lines, to achieve load bearing and adhesion bonding system.

Once patching, pumping or injecting works have been done, before laying Carbon Fiber Mesh Fabric System, all surfaces must be Hammer Test for Polymer Cementitious Mortar, High Strength Cementitious Grout and Pull-Off Test for Cracks Lines. For achievement of strength requirement please consult your local Engineer.

Over Head Application Vertical Application

Applied on Over Head or Vertical Beam and Slab, either Primer, Adhesive & Resin, Waste of materials are approximately 15% .

IMPORTANT

All reinforced structural corners must be rounded to a radius of at least 15mm, before laying the Carbon Fiber Mesh Fabric System.

Mixing of Primer

Use a low speed (300 to 500 rpm) electric drill fitted with a paint mixer or a wing type paddle Pour one unit of Part A & B into drum and mix for at least 3 minutes until the mix is uniform and free. Note: Once been mixed, the Primer must be applied within 30 minutes of Pot Life.

For Uneven Surfaces

Mixing of Paste Putty

Use a low speed (300 to 500 rpm) electric drill fitted with a paint mixer or a wing type paddle. Pour one unit of Part A & B into drum and mix for at least 5 minutes until the mix is uniform and free. Note: Once have been mixing, the Paste Putty must be applied within 60 minutes of Pot Life.

Mixing of Resin Wrap

Use a low speed (300 to 500 rpm) electric drill fitted with a paint mixer or a wing type paddle. Pour one unit of Part A & B into drum and mix for at least 3 minutes until the mix is uniform and free. Note: Once have been mixed, the Epoxy Resin or Polyurethane Resin must be applied within 60 minutes of Pot Life.

System Recommended Use Resin Component

Epo Resin Wrap is Epoxy Solvent Free (Bisphenol-F)
Two Component of Part A & Part B.
Suitable for applied on Over Head or Vertical or Horizontal Surfaces

Easy Installation The easy to use Carbon Fiber Mesh Fabric system components assure fast, user friendly installation. A complete system is installed in only six (6) steps to properly prepared surfaces within appropriate working conditions.

1. Preparation of Structure, Level the Un-even Surfaces with "Cem Strength"

Apply Cem Strength, at rate applied 2 kg/m² to 12 kg/m², polymer cementitious mortar is a material that is applied using a squeegee or trowel to level uneven concrete surfaces. (Curing time: ½ hour to 4 hours depend of whether temperature)

2. Roll "Epo Bond Primer"

Apply Epo Bond Primer, at rate applied 0.20 kg/m² to 0.30 kg/m², and applied using a roller. (Curing time: 2-4 hours)

3. Apply First Coat of "Epo Resin Wrap"

Apply Epo Resin Wrap, at rate applied 0.25 kg/m² to 1.00 kg/m², and is a high solids Epoxy Based Resin that can be applied using a roller to begin saturation of the fiber reinforcement sheet. (Curing time: ½ hour to 4 hours depend of whether temperature)

4. Apply Carbon Fiber Mesh Fabric of "Build Mesh CF"

The backbone of the Carbon Fiber composite strengthening system, Build Mesh CF carbon fiber mesh fabric sheet, is placed into the first layer of wet saturated and backing paper is removed. During the laying of Carbon Fiber Mesh Fabric Sheet, Keep the fiber direction properly.

5. Apply Second Coat of "Epo Resin Wrap"

Apply Epo Resin Wrap, at rate applied 0.25 kg/m² to 1.00 kg/m², and is a high solids Epoxy Based that can be applied using a roller to begin saturation of the fiber reinforcement sheet. (Curing time: ½ hour to 4 hours depend of whether temperature)

6. Note: Apply Optional Topcoat

Where required, the Carbon Fiber high solids, high gloss, corrosion -resistant topcoat provides a protective/aesthetic outer layer. (Refer to Manufacture)
In the case of two layers and several layers of "Build Mesh CF". For multiple plies repeat steps 3, 4 and 5. All direction of fiber overlapping must be at least 100mm



LaMaCo System Sdn Bhd

407, Jalan Perusahaan 6, Taman Bandar Baru Mergong,
05150 Alor Setar, Kedah. Malaysia

Tel : + 60-4-734 5555

Fax : + 60-4-772 4444

Http : www.lamaco.com

Email : info@lamaco.com

Important 1: While the information and data sheet contained in this promotional literature are presented in good faith and believed to be reliable, they do not constitute a part of our terms and conditions of sales unless specifically incorporated in our Order acknowledgement. Nothing herein shall be deemed to constitute a warranty, express or implied, that said information or data sheet are correct or that the products described are merchantable or fit for a particular purpose, or that said information, data sheet or products can be used with out infringing patent of third parties.


Important 2: LaMaCo Malaysia products are not guaranteed against defective materials and manufacture & are sold subject to its standard Terms & Conditions of sale, copies of which may be obtained on request. Whilst LaMaCo Malaysia endeavors to ensure that any advice, recommendation, specification or information is accurate and correct, it cannot - because it has no direct or continuous control over where or how its products are applied - accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance any advice, specification, recommendation or information given by it.

Health & Safety Some of the components of this product may be hazardous during mixing and application. Please consult the relevant Health & Safety Data Sheets, available from LaMaCo Malaysia on request and sent with each delivery.

Epo Resin Wrap®

Epoxy Resin Properties of Specification (Liquid Based: Solvent Free)

Compressive Strength	DIN 53454	50 N/mm ²
Flexural Strength	DIN 53452	37 N/mm ²
Tensile Strength	DIN 53455	80 N/mm ²
Bonding Strength	Excellent bond to structural	
Tension Elongation at Break	6%	
Solid Volume	100% High Solid Resin	
Viscosity at 25 C	40000-60000 (± 550) mPa.s	
Density at 25 C	1.02 g/cu. cm	
Pot Life at 25 C	> 45 minutes until 60 minutes	
Cure Time at 25 C	As pot life test method	
Specific Gravity	1020 g/liter	
Flash Point	> 200 C	
Tear Resistance	Excellent on External & Internal Layer	
Abrasion Resistance	10 sec/1000 cycle, 0.01% Peeling of on Top Surfaces	
Fire Resistance	Burning Test, Good Conditions of Class 0	
Coverage Thickness	0.50 kg to 1.20 kg/m ²	
Stability Under Heat	DIN 53458	70 °C
Glass Transition Temp	DIN 53445	90 °C
Shore A Hardness	None	
Shore D Hardness	DIN 53505	82-86%
Packing	2 kg pack, 5 kg pack & 10 kg pack	



LaMaCo System Sdn Bhd

407, Jalan Perusahaan 6, Taman Bandar Baru Mergong,
05150 Alor Setar, Kedah. Malaysia

Tel : + 60-4-734 5555

Fax : + 60-4-772 4444


Http : www.lamaco.com

Email : info@lamaco.com

Epo Bond® Primer

Properties of Specification

	Test Result	Cured Coating
Compressive Strength	DIN 53454	48 N/mm ²
Flexural Strength	DIN 53452	36 N/mm ²
Tensile Strength	DIN 53455	72 N/mm ²
Bonding Strength		Excellent bond to structural
Tension Elongation at Break		2%
Solid Volume		100% High Solid Resin
Viscosity at 25 C		3500 (± 250) mPa.s
Density at 25 C		1.02 g/cu. cm
Pot Life at 25 C		> 25 minutes until 60 minutes
Cure Time at 25 C		Dust-dry Time: 1.5 hours Full Cured: 4 hours
Specific Gravity		1020 g/liter
Flash Point		> 200 C
Tear Resistance		Excellent on External & Internal Layer
Abrasion Resistance		10 sec/1000 cycle, 0.01% Peeling of on Top Surfaces
Fire Resistance		Burning Test, Good Conditions of Class 0
Coverage Thickness		0.15 kg to 0.50 kg/m ²
Stability Under Heat	DIN 53458	70 °C
Glass Transition Temp	DIN 53445	90 °C
Shore A Hardness		None
Shore D Hardness	DIN 53505	75%
Packing		2 kg pack & 5 kg pack



LaMaCo System Sdn Bhd

407, Jalan Perusahaan 6, Taman Bandar Baru Mergong,
05150 Alor Setar, Kedah. Malaysia

Tel : + 60-4-734 5555

Fax : + 60-4-772 4444

Http : www.lamaco.com

Email : info@lamaco.com